

**Alpha Bridge
ASFPP-10G-XR33B
Datasheet**



Features

- Support 9.95Gb/s to 10.3Gb/s data rates
- Simplex LC Connector Bi-Directional SFP+ Optical Transceiver
- Single 3.3V Supply
- Up to 60km on 9/125um SMF
- 1330nm DFB Laser transmitter, 1270nm receiver
- SFP+ MSA SFF-8431 Compliant
- Digital Diagnostic SFF-8472 Compliant
- RoHS compliant and Lead Free
- Operating case temperature: 0°C ~70°C

Applications

- 10GBASE-ER at 10.3125Gbps
- 10GBASE-EW at 9.953Gbps
- Other Optical Links

Description

The SFP+ BWDM series single mode transceiver is small form factor pluggable module for duplex optical datacommunications such as 10GBASE-ER/EW defined by IEEE 802.3ae. It is with the SFP+ 20-pin connector to allow hot plug capability.

The SFP+ BWDM module is designed for single mode fiber and operates at a nominal wavelength of 1330nm; The transmitter section uses a multiple quantum well DFB, which is class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector (IDP) mounted in an optical header and a limiting post-amplifier IC

Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Units
Supply Voltage	VCC	-0.5	3.6	V
Storage Temperature	Tc	-40	85	°C
Operating Case Temperature	Tc	0	70	°C
Relative Humidity	RH	0	85	%

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Units
Supply Voltage	Vcc	3.0	3.3	3.6	V
Supply Current	Icc		300	450	mA
Operating Case Temperature	Tc	0	25	70	°C
Module Power Dissipation	Pm	-	1	1.5	W

Notes:

1. Supply current is shared between VCCTX and VCCR X
2. In-rush is defined as current level above steady state current requirements.

Diagnostics Monitoring

Parameter/Range	Symbol	Accuracy	Unit	Notes
Temperature monitor absolute error	DMI_Temp	± 3	°C	
Supply voltage monitor absolute error	DMI_VCC	±0.3	V	
TX power	DMI_TX	± 3 dB	dBm	
RX power	DMI_RX	± 3 dB	dBm	
Bias Current monitor	DMI_Ibias	± 10%	mA	

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Note
Transmitter						
Optical Wavelength	λ_C	1320	1330	1340	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Spectral Width (-20dB)	$\Delta\lambda$			1	nm	
Average Output Power	Pop	1		5	dBm	1
Extinction Ratio	ER	3.5			dB	
Eye Mask	Compliant with IEEE 802.3					
Transmitter Dispersion Penalty	TDP			3.2	dB	
Launch Power of OFF Transmitter	POUT_OFF			-30	dBm	
Relative Intensity Noise	RIN			-128	dB/Hz	
Receiver						
Center wavelength	λ_C	1260	1270	1280	nm	
Average Receiver Power	PSENS			-20	dBm	1,2
Receiver Overload	P _{MAX}	-7			dBm	
LOS Assert	LOSA	-28			dBm	
LOS De-assert	LOSD			-25	dBm	
LOS Hysteresis	LOSH	0.5			dB	

Notes:

1. Average Receiver Power (Min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant.
2. Measured with a PRBS2³¹-1 test pattern @10.3125Gbps, BER≤10⁻¹²


Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Note
Transmitter						
Input differential impedance	RIN		100		Ω	2
Single-ended data input swing	V _{in_PP}	150		1200	mVpp	
Transmit Disable Voltage	VD	2		V _{cc}	V	
Transmit Enable Voltage	VEN	VEE		VEE+0.8	V	3
Receiver						
Output Differential impedance	Rout		100		Ω	2
Single-Ended Data Output Swing	VOUT_PP	300		700	mV	4
LOS Fault	VLOS fault	2		VCCHost	V	5
LOS Normal	VLOS norm	VEE		VEE+0.8	V	5

Notes:

1. Module power consumption never exceeds 1W.
2. AC coupled.
3. Or open circuit.
4. Into 100-ohm differential termination.
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic1 indicates no signal detected.

Block Diagram of Transceiver

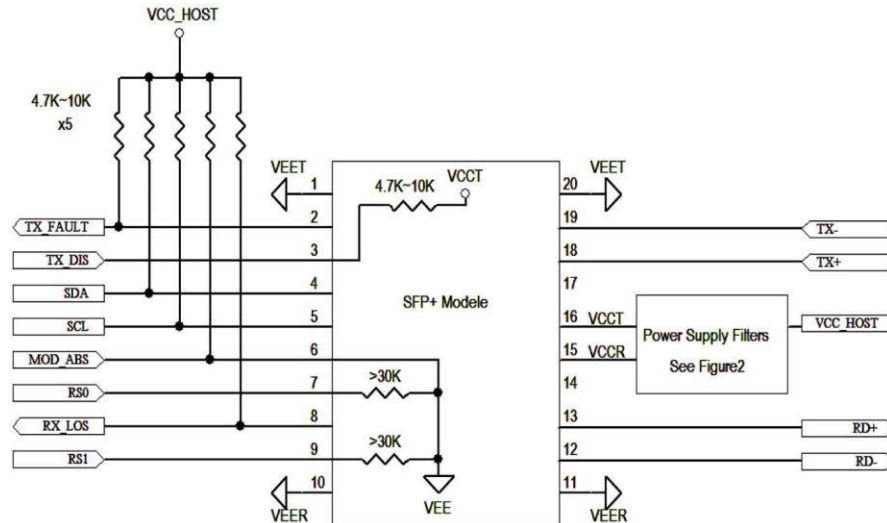


Pin Description

Pin	Name	Description	Notes
1	VEET	Transmitter ground (common with receiver ground)	1
2	TX_FAULT	Transmitter Fault	2
3	TX_DISABLE	Transmitter Disable. Laser output disabled on high or open	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	RS0 for Rate Select: Open or Low = Module supports ≤4.25Gbps	5
8	LOS	High = Module supports 9.95 Gb/s to 10.3125 Gb/s	
9	RS1	Loss of Signal indication. Logic 0 indicates normal operation	1
10	VEER	No connection required	1
11	VEER	Receiver ground (common with transmitter ground)	1
12	RD-	Receiver Inverted DATA out. AC coupled	1
13	RD+	Receiver Non-inverted DATA out. AC coupled	
14	VEER	Receiver ground (common with transmitter ground)	1
15	VCCR	Receiver power supply	
16	VCCT	Transmitter power supply	
17	VEET	Transmitter ground (common with receiver ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC coupled	
19	TD-	Transmitter Inverted DATA in. AC coupled	
20	VEET	Transmitter ground (common with receiver ground)	1

Notes:


- Module circuit ground is isolated from module chassis ground within the module.
- should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
- TX Disable is an input contact with a 4.7k~10kΩ pullup to VccT inside the module.
- Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
- RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.

Dimensions

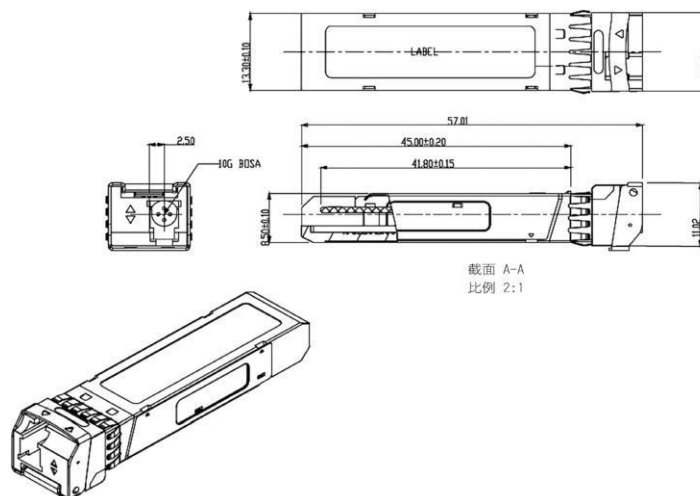

Optical Receptacle Cleaning Recommendations:

All fiber stubs inside the receptacle portions were cleaned before shipment. In the event of contamination of the optical ports, the recommended cleaning process is the use of forced nitrogen. If contamination is thought to have remained, the optical ports can be cleaned using a NTT international Cletop® stick type and HFE7100 cleaning fluid. Before the mating of patch-cord, the fiber end should be cleaned up by using Cletop® cleaning cassette.

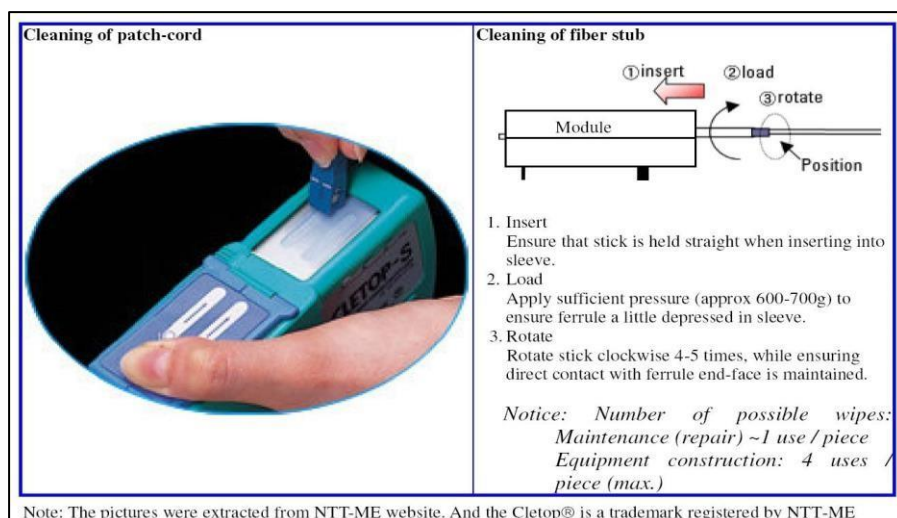

Ordering Information

Model Number	Part Number	TX/RX	Voltage	Reach	Temperature
ASFPP-10G-XR33B	OPAK-W60-33-CF	1330/1270	3.3V	60 km	0°C to 70 °C

Note: All information contained in this document is subject to change without notice.