

Alpha Bridge AQSFP-F-01-A/SFPP/4 Datasheet

Features

- Four-channel full-duplex active optical cable with breakout from QSFP+ to four SFP+
- Up to 10.3125Gb/s per channel
- Hot-pluggable QSFP+ and SFP+ MSA-compliant connectors
- Low power dissipation: <1.5W on QSFP+ end, <1W on SFP+ ends
- Built-in digital diagnostic functions
- Commercial operating case temperature range: 0 to 70°C
- RoHS-6 compliant (lead free)



Application

- High performance computing interconnect
- InfiniBand SDR/DDR/QDR interconnect
- 4x 10G Ethernet interconnect

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.
Supply Voltage	Vcc	-0.3V	3.6V
Storage Temperature	Ts	-20°C	85°C
Case Operating Temperature	Tc	0°C	70°C
Relative Humidity (non-condensation)	RH	5%	95%

General Product Characteristics

Parameter	Value	Note
Module Form Factor ₁	QSFP+ and SFP+	1
Number of Lanes	4 Tx and 4 Rx	
Maximum Aggregate Data Rate	41.25Gb/s	
Maximum Data Rate per Lane	10.3125Gb/s	
Protocols Supported	10G Ethernet	
Electrical Interface and Pin-out ₁	38-pin edge connector (QSFP+), 20-pin edge connector (SFP+)	1
Maximum Power Consumption per End	1.5W (QSFP+), 1W (SFP+)	
Management Interface ₄	Serial, I ² C-based	2

Notes:

1. As defined by QSFP+ MSA and SFP+ MSA, "INF-8438i Rev 1.0", "SFF-8431, Revision 4.1".
2. As defined by "SFF-8636 Rev 2.6", "SFF-8472 Rev 11.0".

Electrical Specifications


(Tc= 0 to 70°C, Vcc=3.3±5%V)

Parameter	Symbol	Min	Typical	Max	Notes
Differential Input Impedance	Zin	90Ω	100Ω	110Ω	
Differential Output Impedance	Zout	90Ω	100Ω	110Ω	
Differential Input Voltage Amplitude	ΔVin	300mV		1100mV	1
Differential Output Voltage Amplitude	ΔVout	500mV		800mV	2
Skew	Sw			300ps	
Bit Error Rate	BER			10 ⁻¹²	
Input Logic Level High	VIH	2.0V		Vcc	
Input Logic Level Low	VIL	0V		0.8V	
Output Logic Level High	VOH	Vcc-0.5		Vcc	
Output Logic Level Low	VOL	0V		0.4V	

Notes:

1. Measured between TxnP and TxnN.
2. Measured between RxnP and RxnN.

Dimensions

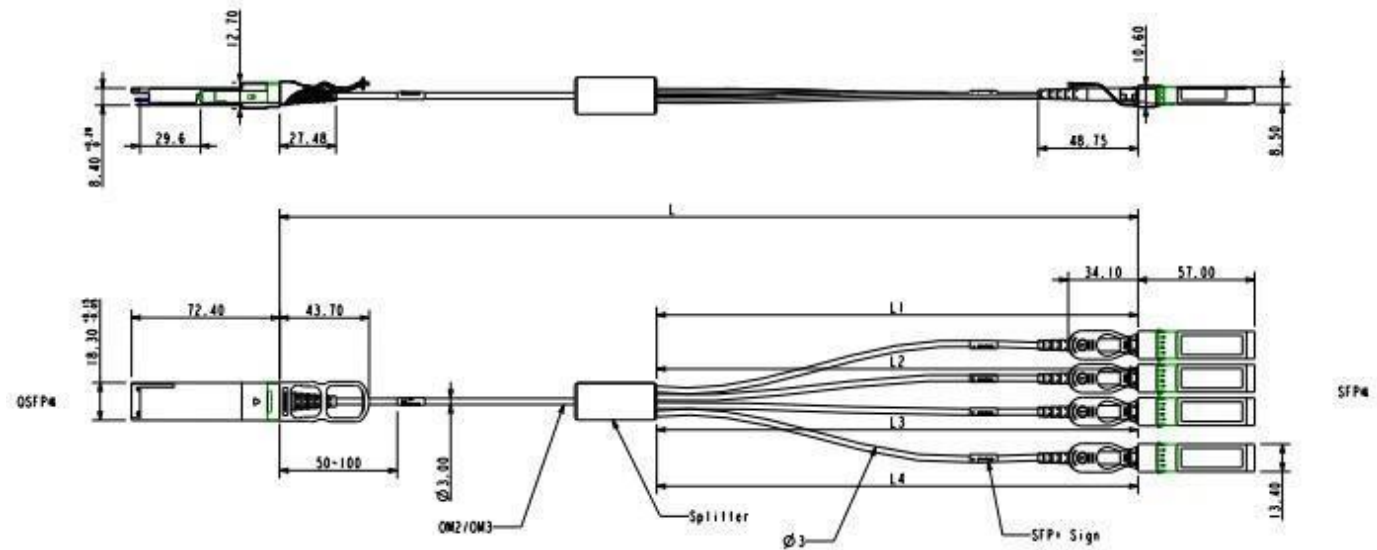

Ordering Information

Part Number	Model Number	Length (M)	Voltage	Temperature
AQSFP-F-01-A/SFPP/4	Active Optical Cable	1	3.3V	0°C to 70 °C

Note: All information contained in this document is subject to change without notice.

Copyright @ Alpha Bridge Technologies Private Limited
This document is ABTPL Public Information. ABTPL reserves the right to alter, update and otherwise change the information contained in the document from time to time. www.alphabridge.tech